




SIMPO HV



One-Person Installation

Easy Assembly With Screwless Module Connection



Charging At -10°C

Low Temperature Battery Technology



IP65-Rated

Ideal For Indoor And Outdoor Use With IP65 Protection



Quick Connect

Plug-In Terminals

Engineered for robust energy storage, harnessing 17kW of peak power when seamlessly integrated with Kostal, redefining home energy efficiency

SIMPO HV offers enhanced energy storage capabilities, maximizing efficiency and reliability in managing household energy consumption. With robustness in energy storage capacity and a high C rate, it ensures optimal performance and longevity. Seamless integration with Kostal achieves peak power output, providing convenience and control.

Contact

ZYC Energy Deutschland

Königstraße 35, 70173 Stuttgart, Deutschland
+49 711 99871998

ZYC Energy B.V.

Stationsplein 45, Unit 4.004, 3013AK Rotterdam,
Netherlands
+31 6 020 700 00

ZYC Energy Australia Pty Ltd

Suite 3 7 Ridge St, NORTH SYDNEY NSW, 2060,
AUSTRALIA
+61 2 8006 1868
service@zyc-energy.com.au

ZYC Lithium Batteries S.L.


Calle Angelita Cavero 13 Oficina 4 Madrid (28027)
España
+34 697919475
info@zyc-europe.com

ZYC Energy Company Limited

GuangKe Road 1, Pingshan, Shenzhen, P.R. China
+86 (0) 755-2839 4019
sales@zyc.energy



Service Contact: service@zyc.energy
Business Contact: sales@zyc.energy

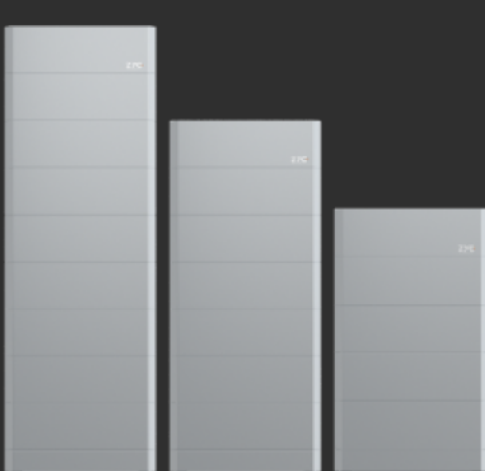


SIMPO HV

Residential ESS / Small C&I
Easy Stackable 120-657V
6.4kWh-230.4kWh

SIMPO HV

| Module Data | 3.2kWh, 64V, 36kg | | | | | | | |
|-----------------------------|---|---------|---------|---------|---------|---------|---------|---------|
| Module Quantity In Tower | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
| Usable Energy (kWh) | 6.4 | 9.6 | 12.8 | 16 | 19.2 | 22.4 | 25.6 | 28.8 |
| Nominal Voltage (V) | 128 | 192 | 256 | 320 | 384 | 448 | 512 | 576 |
| Operating Voltage Range (V) | 120-146 | 180-219 | 240-292 | 300-365 | 360-438 | 420-511 | 480-584 | 540-657 |
| Max Continuous Current (A) | 30 | | | | | | | |
| Peak Output (A) | 45, 5s | | | | | | | |
| Weight (Kg) | 102 | 138 | 174 | 210 | 246 | 282 | 318 | 354 |
| Dimension_W (mm) | 610 | | | | | | | |
| Dimension_D (mm) | 240 | | | | | | | |
| Dimension_H (mm) | 670 | 860 | 1050 | 1240 | 1430 | 1620 | 1810 | 2000 |
| Round-trip Efficiency | ≥96.0% | | | | | | | |
| Charging Temp Range (°C) | -10-50 | | | | | | | |
| Discharging Temp Range (°C) | -20-50 | | | | | | | |
| Operating Humidity | Up to 95% (Non-condensing) | | | | | | | |
| IP Rating | IP65 | | | | | | | |
| Communication | CAN / Modbus RS485 | | | | | | | |
| Altitude (m) | ≤3000 | | | | | | | |
| Warranty | 10 Years | | | | | | | |
| Scalability (Parallel) | 1-8 Towers | | | | | | | |
| Certificate | UN38.3 / CE / IEC62619 / CEC / VDE2510-50 | | | | | | | |

16 Premium Benefits To Simplify Your Project



LFP Prismatic

Reliable chemistry for energy storage needs



IP65-Rated

Ideal for indoor and outdoor use with IP65 protection



Operation Voltage

120-700V Range



Parallel Connection

Connect up to 8 towers in parallel



Optimized Parallel Connection

Hot-Swappable towers for uninterrupted operation



Smart Start

No APP needed, just one-click setup



Portal Monitoring

Real-Time access and control of your system



High C Rate

Maximizing performance with resilient power output



Smaller Floor Print

Compact and installation floor print reduced by 30%



One-Person Installation

Easy assembly with screwless module connection



Quick Connect

Plug-in terminals



Intelligent HMI

Features data display and black start capabilities



Min/Max System Size

6.4KWh-230.4KWh, for residential and C&I



Low Temperature Performance

Ensures optimal charging even at -10°C



Cybersecurity

Robust cybersecurity measures



Performance Warranty

10 years performance warranty

KOSTAL GOODWE solis



Minimum Configuration for Entry-level Storage



6.4kWh



28.8kWh



C&I Ready
28.8kWh * 8=230.4kWh

Kostal Inverters Compatibility List

| | HV6.4 | HV9.6 | HV12.8 | HV16 | HV19.2 | HV22.4 | HV25.6 | HV28.8 |
|-------------------------|-------|-------|--------|------|--------|--------|--------|--------|
| PLENTICORE G3 S-4.0 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| PLENTICORE G3 S-5.5 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| PLENTICORE G3 S-7.0 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| PLENTICORE G3 M-8.5 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| PLENTICORE G3 M-10 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| PLENTICORE G3 M-12.5 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| PLENTICORE G3 L-15 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| PLENTICORE G3 L-17.5 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| PLENTICORE G3 L-20 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| PLENTICORE plus G2 3.0 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| PLENTICORE plus G2 4.2 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| PLENTICORE plus G2 5.5 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| PLENTICORE plus G2 7.0 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| PLENTICORE plus G2 8.5 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| PLENTICORE plus G2 10 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| PLENTICORE BI G2 5.5/26 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| PLENTICORE BI G2 10/26 | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |

Solis Inverters Compatibility List

| | HV6.4 | HV9.6 | HV12.8 | HV16 | HV19.2 | HV22.4 | HV25.6 | HV28.8 |
|-----------------------|-------|-------|--------|------|--------|--------|--------|--------|
| S6-EH3P(5-10)K2-H | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| S6-EH3P(5-10)K-H-AU | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| RH1-3P(5-10)K-HVES-5G | -- | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| S6-EH3P(12-20)K2-H | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |

Goodwe Inverters Compatibility List

| | HV6.4 | HV9.6 | HV12.8 | HV16 | HV19.2 | HV22.4 | HV25.6 | HV28.8 |
|------------|-------|-------|--------|------|--------|--------|--------|--------|
| GW5K-ET | -- | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| GW6.5K-ET | -- | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| GW8K-ET | -- | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| GW10K-ET | -- | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| GW5KN-ET | -- | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| GW6.5KN-ET | -- | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| GW8KN-ET | -- | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| GW10KN-ET | -- | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ | -- |
| GW15K-ET | -- | -- | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| GW20K-ET | -- | -- | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| GW25K-ET | -- | -- | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| GW299K-ET | -- | -- | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| GW30K-ET | -- | -- | ✓ | ✓ | ✓ | ✓ | ✓ | ✓ |
| GW3600N-EH | ✓ | ✓ | ✓ | ✓ | ✓ | -- | -- | -- |
| GW5000N-EH | ✓ | ✓ | ✓ | ✓ | ✓ | -- | -- | -- |
| GW6000N-EH | ✓ | ✓ | ✓ | ✓ | ✓ | -- | -- | -- |
| GW3600-EH | ✓ | ✓ | ✓ | ✓ | ✓ | -- | -- | -- |
| GW5000-EH | ✓ | ✓ | ✓ | ✓ | ✓ | -- | -- | -- |
| GW6000-EH | ✓ | ✓ | ✓ | ✓ | ✓ | -- | -- | -- |
| GW3k-BH | ✓ | ✓ | ✓ | ✓ | ✓ | -- | -- | -- |
| GW3600-BH | ✓ | ✓ | ✓ | ✓ | ✓ | -- | -- | -- |
| GW5000-BH | ✓ | ✓ | ✓ | ✓ | ✓ | -- | -- | -- |
| GW6000-BH | ✓ | ✓ | ✓ | ✓ | ✓ | -- | -- | -- |