


ROOF HOOK PROLINE UNIVERSAL

PRODUCT SHEET

- + Suitable for most tile roofs
- + Uses shorter fastening plate but achieving same reach on rafters
- + Middle bracket can be set in 3 different locations & is height adjustable

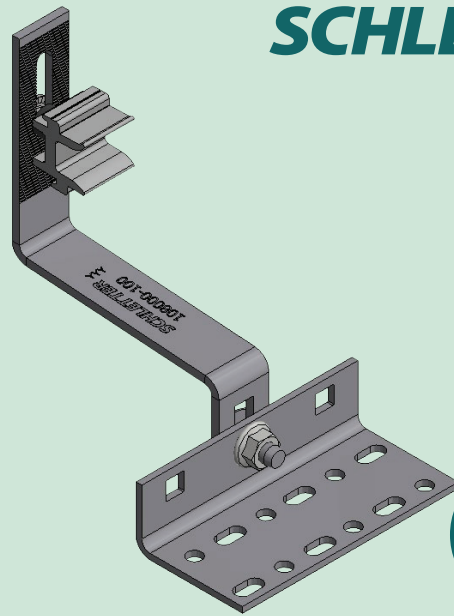


Quick solution for various tiled roofs

The new height adjustable roof hook by Schletter is a versatile solution designed for safe and efficient portrait installation of photovoltaic systems on pitched, tiled roofs.




Made from high-quality stainless steel and aluminium elements, it offers enhanced durability and corrosion resistance, ensuring long-lasting performance.

The adjustable design accommodates various tile geometries while maintaining structural integrity and weatherproofing. This robust hook optimizes load distribution, reducing stress on roof tiles and minimizing the risk of breakage or water leakage.

Schletter's adjustable roof hook addresses critical challenges in roof-mounted PV installations, simplifying installation and enhancing the system's overall reliability.

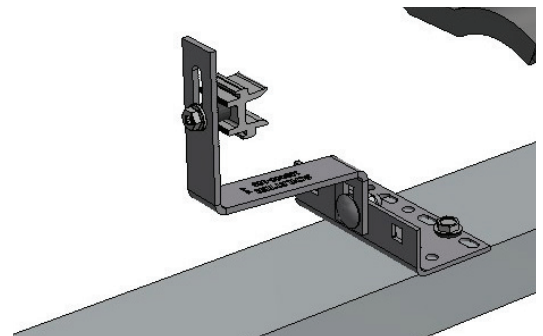


Suitable height range

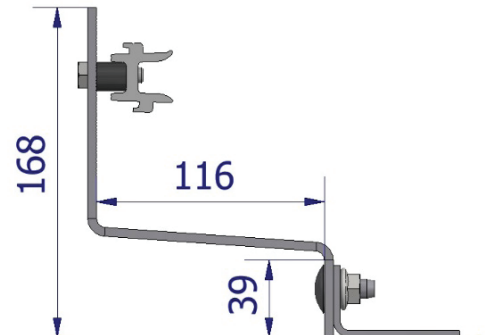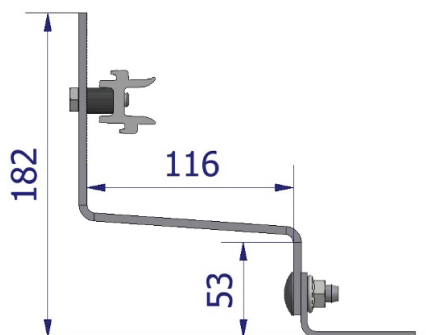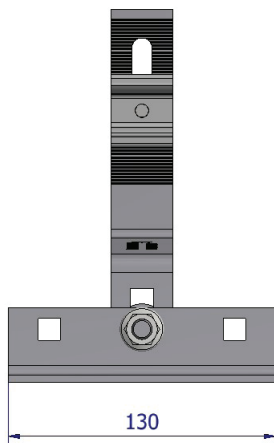

TECHNICAL DETAILS

Scope of application	Compatible with various roof tiles
Material	Systems components: + Stainless Steel Brackets + Aluminium Fastening Elements + Stainless Steel Screws
Planning aid	Configuration and structural analysis via Schletter Configurator
Structural analysis	Structural analysis according to the current specific national standards (Australia AS/NZS 1170.2-2021 & AS 1684). It also complies with DIN EN 1991-1 based on Eurocodes and general construction approvals. Roofing and building certificates are not included. Any instructions on required certification and approval must be observed.
Required tools	TORX 40, M15 Socket
Warranty	25 years according to our warranty terms

Article overview	
108000-100	Roof Hook UNIVERSAL 
Accessories (pre-assembled)	
<ol style="list-style-type: none"> 1. Plate 130x64x36x3.5mm 2. Bracket 30x4.5mm 3. Bolt CS DIN603 M10X25 A2-70 DL 4. Bolt HX TX LS M8X25 A2-70 DL 5. Clamping Part Rapid-Pro 6. Rubber hose for compression spring 7. M10 Flange nut serrated DIN6923 A4 	