

NEOSTAR

3S54 Mono-Glass Module

465W-495W

Technical Features:

 Partial Shading Optimisation

 Better Temperature Coefficient

 High Temperature Restriction

 Micro-crack Resistance

 Higher Power

 Lower BOS

 More Aesthetic Values

 Infinite Technology



reddot winner 2023



Product
Warranty



Performance
Warranty



Warranty partner

Munich RE



Made in China



495W
Output

24.8%
Efficiency

1%
First-year Degradation

0.35%
Annual Degradation from Year 2-30

30-year Linear Performance Warranty

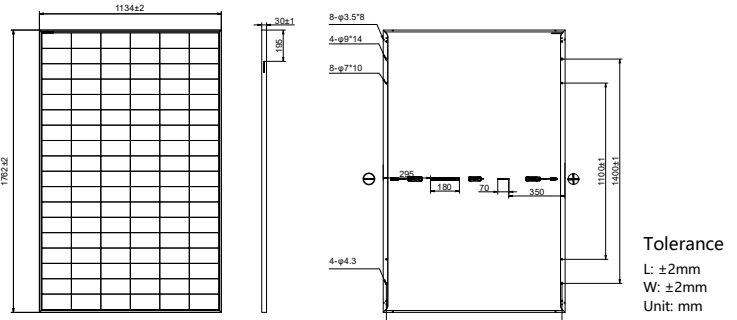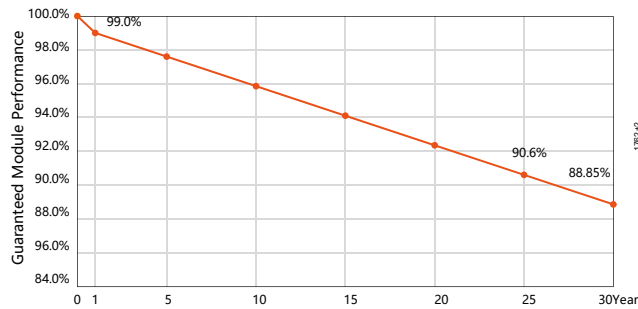

Electrical Characteristics (STC: AM1.5 1000W/m² 25°C NOCT: AM1.5 800W/m² 20°C 1m/s)

Power Binning Tolerance: 0~ + 3%

Module Type	AIKO-A465-MCE54Mb		AIKO-A470-MCE54Mb		AIKO-A475-MCE54Mb		AIKO-A480-MCE54Mb		AIKO-A485-MCE54Mb		AIKO-A490-MCE54Mb		AIKO-A495-MCE54Mb	
Test Conditions	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
P _{max} [W]	465	352	470	356	475	360	480	364	485	367	490	371	495	375
V _{oc} [V]	40.60	38.52	40.70	38.61	40.80	38.71	40.90	38.80	41.00	38.90	41.10	38.99	41.20	39.09
V _{mp} [V]	34.20	32.45	34.30	32.54	34.40	32.64	34.50	32.73	34.60	32.83	34.70	32.92	34.80	33.02
I _{sc} [A]	14.69	11.87	14.72	11.89	14.76	11.93	14.80	11.96	14.84	11.99	14.88	12.02	14.92	12.06
I _{mp} [A]	13.60	10.87	13.71	10.96	13.81	11.04	13.92	11.13	14.02	11.21	14.13	11.29	14.23	11.37
Module Efficiency	23.3%		23.5%		23.8%		24.0%		24.3%		24.5%		24.8%	

Product Specification

Cell Type	N-Type BC
Glass	3.2mm tempered glass
Backsheet	High weather resistant backsheet
Frame	Black anodized aluminum
Cable	4mm ² (IEC) 12AWG(UL) ±1200mm
No. of Cells	108(6*18)
Junction Box	IP68, 3 bypass diodes
Connector	PV-KST4-EVO 2A/6I/ PV-KBT4-EVO 2A/6I from Staubli Electrical Connectors AG
Weight	20.6kg±3%
Dimension	1762*1134*30mm
Package Detail	37pcs per pallet / 222pcs per 20'GP / 962pcs per 40'HC

Temperature Ratings (STC)

Temperature Coefficient of I _{sc}	+ 0.05%/ °C
Temperature Coefficient of V _{oc}	- 0.22%/ °C
Temperature Coefficient of P _{max}	- 0.26%/ °C

Installation Guide

T ₉₈ max	70°C
Module Operation Temperature	-40°C - +85°C
Maximum Series Fuse Rating	25A
Protection Class	Class II
P _{MAX} and V _{OC} and I _{SC} Tolerance	±3%
Maximum System Voltage	DC1500V
Maximum Static Loading	Front 5400Pa Back 2400Pa
Hail Test	40 mm diameter hail at 27.5 m/s
Fire Rating	IEC Class C

